





## Next Generation Portable Card Counter

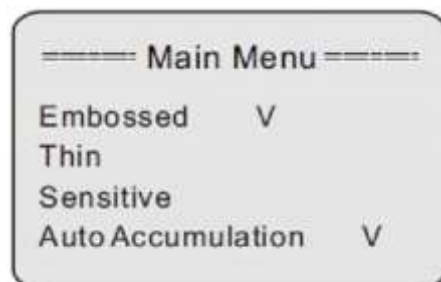

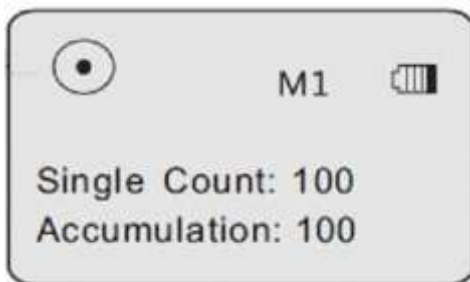

## Features:

- Count Modes: Single Count and Accumulation Count
- Ergonomic Keys: Two scan keys, two accumulation keys Intelligent keys on the left and right side, compatible for left and right hand user
- Universal Li-battery
- Battery charging method: Plug, USB or wireless charging
- Power Save: Auto power off if no operation within 30 seconds; power on by pressing any key
- Data record and upload: Counting data could be recorded, and with data management software, the data could be easily uploaded to PC.
- Integrates counting modes menu for different types of cards.
- Visual display and audio signal help judging the counting results

## Technical Details:

Power	<ul style="list-style-type: none"> <li>• Battery : Li-ion 3.6V/1600mAh</li> <li>• Compatible of NOKIA 6100 (BL-4C)</li> </ul>
Working Environment	<ul style="list-style-type: none"> <li>• Working Temperature : 10°C~40°C</li> <li>• Working Humidity : 30%~90%</li> </ul>
Single Time Counting Quantity	1~2000pcs
Maxim Accumulation	999999pcs
Dimensions	175mm(L)×70mm(W)×36mm(H)
Weight	200g

## Menu Options:

Embossed	Select it for counting embossed cards
Thin	Select it for counting cards thinner than 0.60mm
Sensitive	Select it for counting the pure white color cards
Auto Accumulation	Select it to accumulate the counting sweeps
Sound mode	Select it to turn on/off the buzzer

## Specifications:



Keys	<ul style="list-style-type: none"> <li>○ User-friendly design, two counting keys</li> <li>○ Bidirectional counting keys make right-hand and left-hand users to operate it with comfort and accuracy</li> </ul>
Screen display	<ul style="list-style-type: none"> <li>○ LCD display</li> <li>○ Battery capacity indication, charge indication</li> <li>○ Low power alarm indication</li> <li>○ Self oriented display when left-hand or right-hand keys are used.</li> </ul>
Battery	<ul style="list-style-type: none"> <li>○ High capacity lithium battery</li> <li>○ Low-consumption chip rated at less than 320mAh.</li> <li>○ Three charging modes: via USB, via universal 5V charger, and via wireless charge from the wireless charging base.</li> </ul>
Power On/Off	<ul style="list-style-type: none"> <li>○ In power off status, press the 'multifunction key' to power on the counter.</li> <li>○ Auto standby / power off function: The counter will stay in standby mode in inactive for 20 seconds, and power off automatically if no operation in 60 seconds.</li> </ul>
Count Mode	Single Count and Accumulation Count
Accumulation	<ul style="list-style-type: none"> <li>○ Automatic Accumulation: Press 'Multifunction Key' to switch between 'Single Counting' and 'Accumulation' mode.</li> <li>○ Manual Accumulation: Press 'Multifunction Key' to accumulate each counting record.</li> </ul>
Counting Card Category	<ul style="list-style-type: none"> <li>○ Card material: ABS / PVC / PET, Transparent Plastic, Paper</li> <li>○ Card thickness: PVC ~ 0.38mm – 1.2mm/ABS ~ 0.5mm – 1.2mm/Paper~ 0.4mm – 1.2mm</li> <li>○ Card types: white, printed, embossed, indented, with black intermediate layer</li> </ul>